


Exhibit "E"
Page 1 of 2

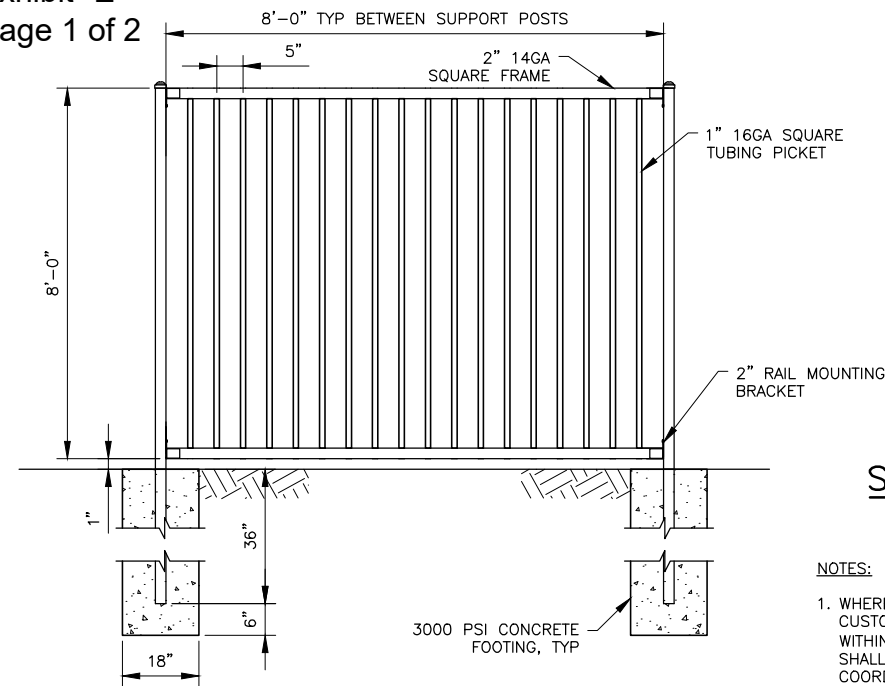


SECTION VIEW

NOTES:

1. WHERE ELEVATION CHANGES DUE TO DRAINAGE CHANNEL, CUSTOM FABRICATED PICKETS SHALL BE INSTALLED TO EXTEND WITHIN 3" OF GRADE OF CHANNEL. LENGTH OF PICKETS SHALL BE VERIFIED BY THE CONTRACTOR IN THE FIELD AND COORDINATED WITH MANUFACTURER.
2. CUSTOM FABRICATED SHORT RAILS AND PICKETS SHALL BE INSTALLED TO SECURE GAP BETWEEN PROPOSED POSTS AND EXISTING WALLS AND WALL COLUMNS. GAP SHALL NOT EXCEED 4 INCHES.
3. ORNAMENTAL FENCE (STYLE AND COLOR) SHALL BE SELECTED BY OWNER.

ORNAMENTAL FENCE DETAIL (10)

NOT TO SCALE

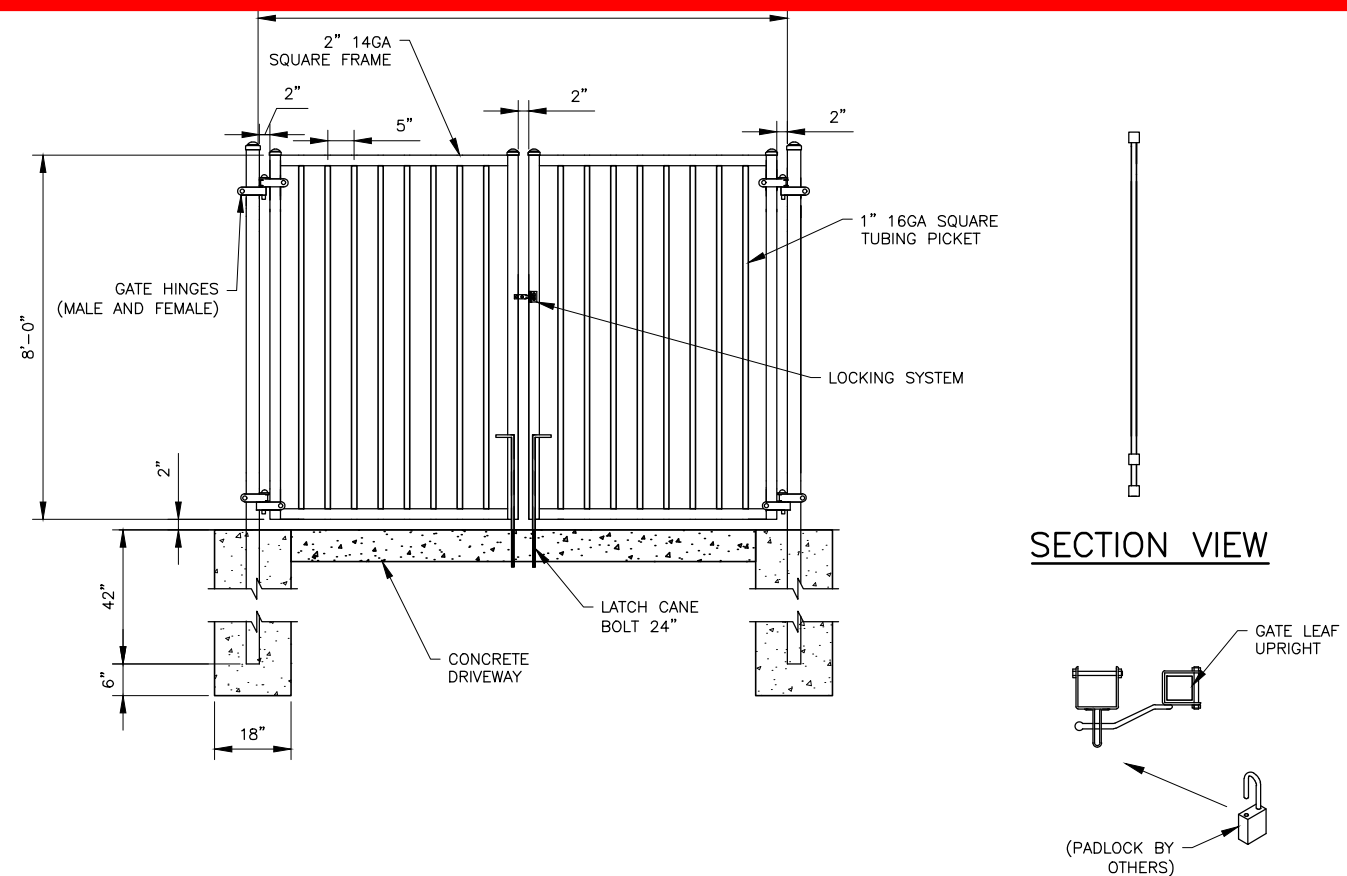

SECTION VIEW

LOCKING SYSTEM


NOT TO SCALE

ORNAMENTAL GATE DETAIL

NOT TO SCALE

11

NOT TO SCALE

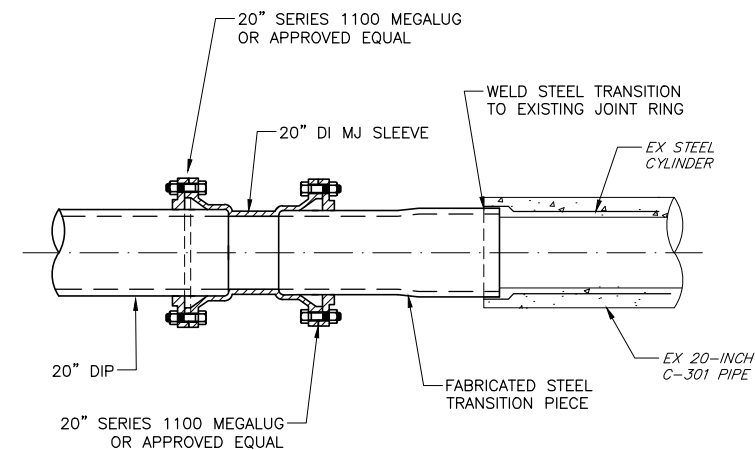


20" DIP TO EX 20" RCCP CONNECTION DETAIL

NOT TO SCALE

12

NOT TO SCALE

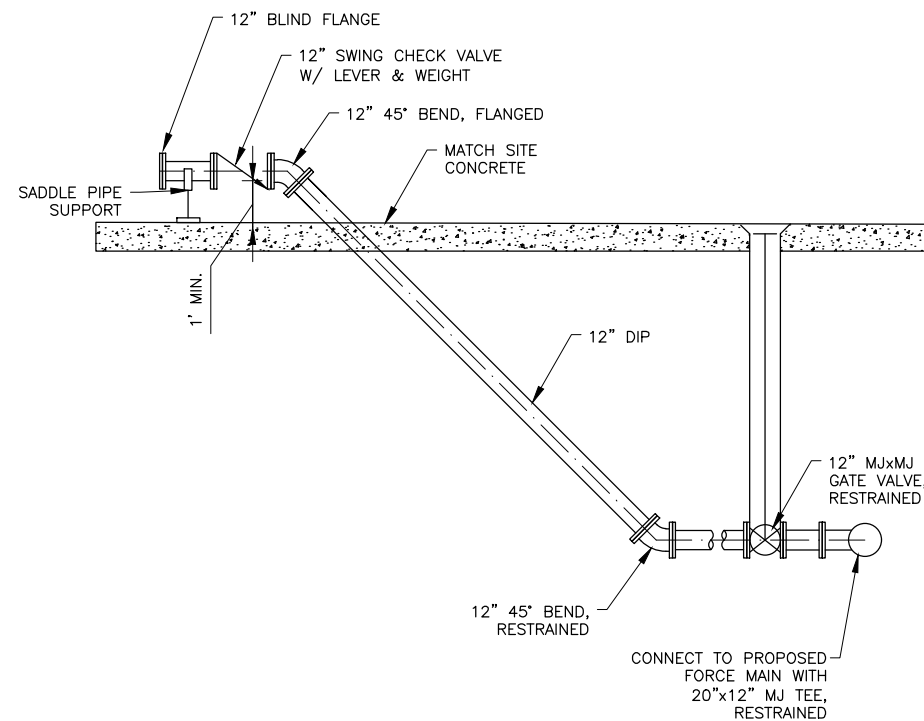

EMERGENCY BYPASS DETAIL


NOT TO SCALE

13

NOT TO SCALE

NOTE:

- NOTE:
1. ALL BURIED FITTINGS AND JOINTS SHALL BE MECHANICALLY RESTRAINED.
 2. SET GATE VALVE PER CITY OF COPPELL DETAILS.
 3. REFER TO DETAIL 2 ON C-903 AND SPECIFICATION 15060 FOR PIPE SUPPORT.

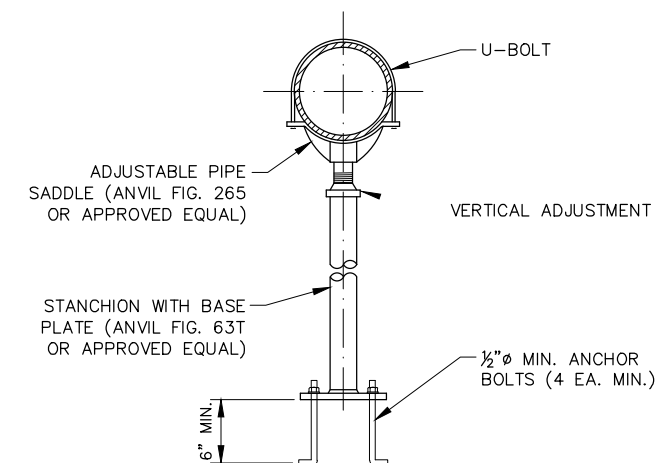

ADJUSTABLE PIPE SADDLE SUPPORT

NOT TO SCALE



NOTES:

1. REFER TO SPECIFICATION 40 05 10 FOR PIPE SUPPORT.
2. ANCHOR BOLTS SHALL BE TYPE 304 STAINLESS STEEL.


Monroe Panels

A clean and simple design with no pickets above the top rail.




Available in 2 or 3 rail styles.

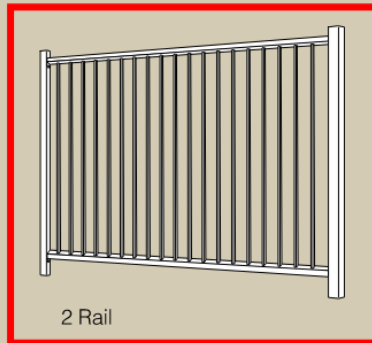

Monroe

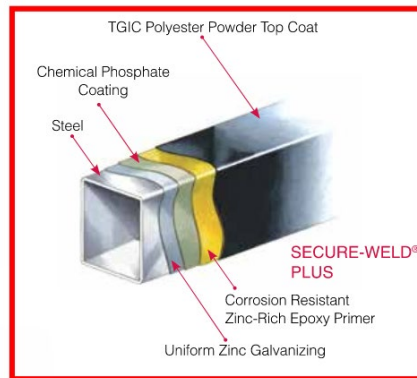

Double Gates

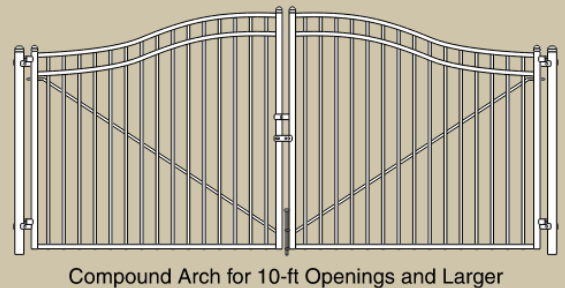

Secure-Trac® Cantilever Gate